



DEPRESSED ENTRANCE LAYOUT
NOT TO SCALE

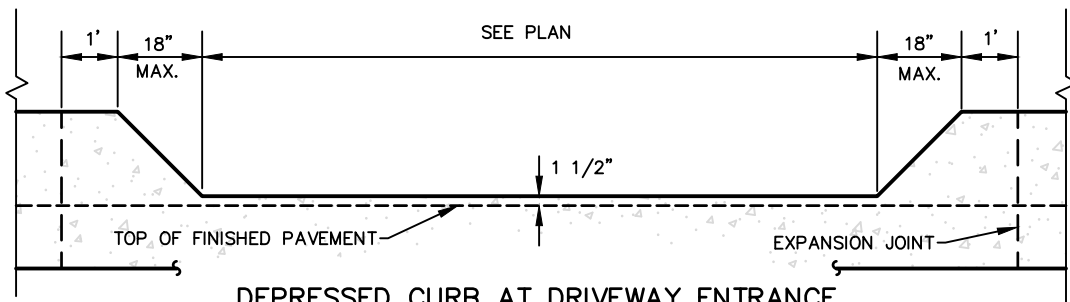

DEPRESSED CURB AT DRIVEWAY ENTRANCE
NOT TO SCALE

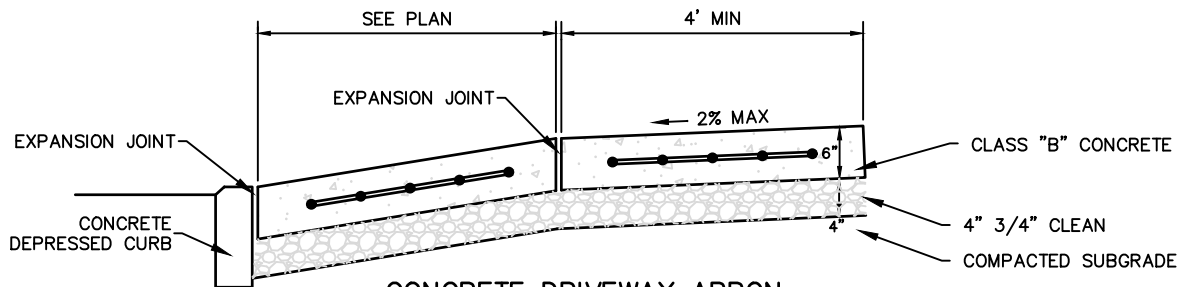

CONCRETE DRIVEWAY APRON
NOT TO SCALE

1. SUBBASE SHALL BE COMPACTED TO THE SATISFACTION OF THE ENGINEER.
2. EXPANSION JOINTS SHALL BE PROVIDED EVERY 10 FEET.
3. 3/16" CONSTRUCTION JOINTS EVERY 5'.
4. SURFACES SHALL BE BRUSHED TRANSVERSELY TO A NEAT FINISH AND ALL JOINTS AND EDGES SHALL BE CLEAN.
5. CONCRETE DRIVEWAY APRONS SHALL BE 6" THICK WITH 6" X 6" X 10 X 10 WELDED WIRE FABRIC.



**PEQUANNOCK
TOWNSHIP**
530 NEWARK-POMPTON TPK
POMPTON PLAINS, NJ 07444
PHONE (973) 835-5700
FAX (973) 835-9396

REINFORCED CONCRETE APRON

**STANDARD DETAIL
ENGINEERING DEPARTMENT
PEQUANNOCK TOWNSHIP**

MORRIS COUNTY

NEW JERSEY

SCALE: N.T.S. DATE: 12/30/2015 SHEET 1 OF 1